Folded roof silhouettes, layered shade and glazed civic entrances beside a compact sports spine and shaded surface parking.

Expansion design study | 5000 Northfield Lane, Spring Hill, Tennessee | parcel relation unverified

Halls	2 x 100,000 SF = 200,000 SF total
Structural module	2 x 150 ft nominal bays per hall; 10 x 33.333 ft longitudinal grid
Clear height	37 ft / 11.278 m target to lowest roof members
Court program	16 indoor + 8 outdoor pickleball; indoor/outdoor basketball; indoor six-a-side; 2 outdoor soccer pitches
Support program	5,000 SF office; 1,000 SF secure entrance; kitchen; 250 actual dining seats; gym/coaching/physio; batting cage
Parking	1,500 physical stalls | surface only | 30 accessible, 6 van
Outdoor land	30.000 gross acres separate from hall and parking footprints
Whole design envelope	49.470 acres, assumed design envelope
Stage	Permanent covered stage and 8,000 guest TARGET; occupancy/egress unapproved
Power	20 MW TARGET; utility infrastructure and service capacity unapproved

WHY THIS IS NOT A BUILD RELEASE

Survey and verified parcel/title/setbacks are missing. No existing campus geometry is used as a base.

Concept members and assemblies are proposed. No foundation sizing, loading, connections, drainage, grading or mechanical design is approved.

Use these sheets to compare layouts and brief a contractor/design team. A licensed Tennessee team must produce coordinated sealed construction documents.

MODEL AUTHORITY

The attached native Blender and IFC files contain the dimensioned model. These vector sheets use that same geometric data; independent audits compare the data against the saved mesh and IFC.



40 m | printed scale 84.63 ft per inch

N*

*assumed north

LEGEND

Blue: main enclosed hall footprints. Grey: the one chosen parking system. Thin grey corridors: 24 ft / 7.315 m drives. Tan: protected pedestrian routes and service reservation. Green: separate 30-acre activity envelope.

Coordinate origin and north are assumed. All levels use design datum +0.000 m; surveyed grades are unknown.

Vehicle paths show connections, not verified swept paths or fire apparatus approval. Gates, exit quantities and turning radii require design review.

Public forecourts are retained ahead of halls. Loading routes are separated where possible; pedestrian crossings require final control details.

Water features are removed. Actual stormwater design, grading, discharge and storage calculations remain required.

SPORTS ADJACENCY

A physical 4.000 m shared walk separates soccer runoff and the nearest pickleball pad. Additional paths within the court group are retained. Soccer and pickleball do not share playing space.

SCHEMATIC | NOT ISSUED FOR CONSTRUCTION | 02 OCTOBER 2026


Assumed site and datum. Dimensions govern concept coordination only. Professional design, survey and approvals required.

WORLDWIDE STAGES

Butterfly / Folded Horizons

A1.01

SPORTS HALL GROUND PLAN

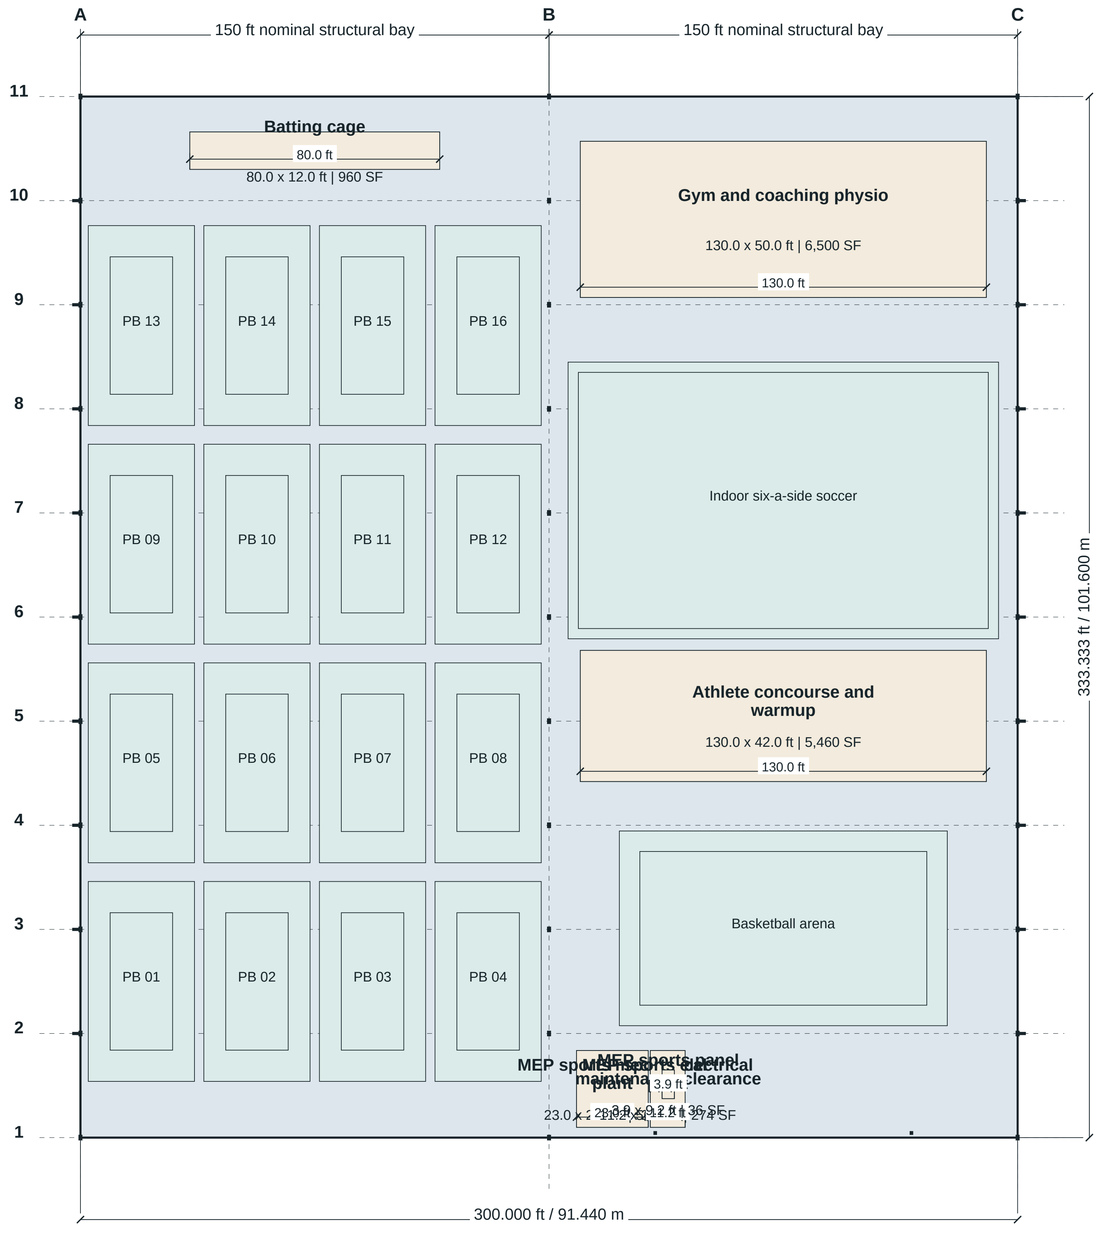

AREA & ROOM SCHEDULE

16 pickleball courts: 20 x 44 ft within 34 x 64 ft free zones.

Basketball: FIBA 28 x 15 m within 32 x 19 m free zone.

Six-a-side: proposed 40 x 25 m within 42 x 27 m free zone. Competition rules and rebound treatment unresolved.

Gym and coaching physio: 6,500 SF allocated

Batting cage: 960 SF allocated

Athlete concourse and warmup: 5,460 SF allocated

MEP sports mechanical plant: 565 SF allocated

MEP sports electrical plant: 274 SF allocated

MEP sports panel maintenance clearance: 36 SF allocated

DOORS & FIT-OUT

Actual openings/fills are included in IFC walls. Front/rear entrance pairs, side exit and high service opening are shown. Door schedule is schematic; quantity, swing, fire rating and travel distances need code review.

Named door dimensions are measured below from exported native door records; operation, accessibility, hardware and rating remain design decisions.

Court planes are native IFC layout annotations. Their graphical depth and Z offsets are not built floor steps or finish layers. Toilet/kitchen fittings are diagram allowances. 250 dining seats are measured.

Two 50,000 SF sections are defined by the structural bay line. The 150 ft nominal grid has 148.885 ft between proposed column faces. Room areas sit inside the 100,000 SF gross hall.

SCHEMATIC | NOT ISSUED FOR CONSTRUCTION | 02 OCTOBER 2026

Assumed site and datum. Dimensions govern concept coordination only. Professional design, survey and approvals required.

ACTUAL EXPORTED OPENING / ASSEMBLY DIMENSIONS

sports front entrance bay0	2.4384m x 2.7432m	ENTRY / EGRESS
sports rear entrance bay0	2.4384m x 2.7432m	ENTRY / EGRESS
sports rear entrance bay1	2.4384m x 2.7432m	ENTRY / EGRESS
sports west egress 2	2.4384m x 2.7432m	ENTRY / EGRESS
sports west egress 6	2.4384m x 2.7432m	ENTRY / EGRESS
sports east loading 7	4.2672m x 4.5720m	LOADING
MEP sports mechanical access wall double door	1.2000m x 2.7432m	ENTRY / EGRESS
MEP sports electrical access wall double door	1.2000m x 2.7432m	ENTRY / EGRESS
sports mainentry pairedunit01	2.4384m x 3.0500m	ENTRY / EGRESS
sports mainentry pairedunit02	2.4384m x 3.0500m	ENTRY / EGRESS
sports mainentry pairedunit03	2.4384m x 3.0500m	ENTRY / EGRESS

Door records identify geometric assemblies and exact model dimensions. Large public openings contain separately detailed paired leaves; no unsupported single24ft door leaf is specified.

Fire rating, operation/swing, panic hardware, closers, automation, glazing impact/safety, thresholds and accessible clear widths require selection and code coordination.


The plan reflects actual native opening/fill relations. Wall-layer voids and leaf/frame hardware exist as geometric design intent, not an approved manufacturer shop drawing.

WORLDWIDE STAGES

Butterfly / Folded Horizons

A2.01

EVENTS HALL GROUND PLAN

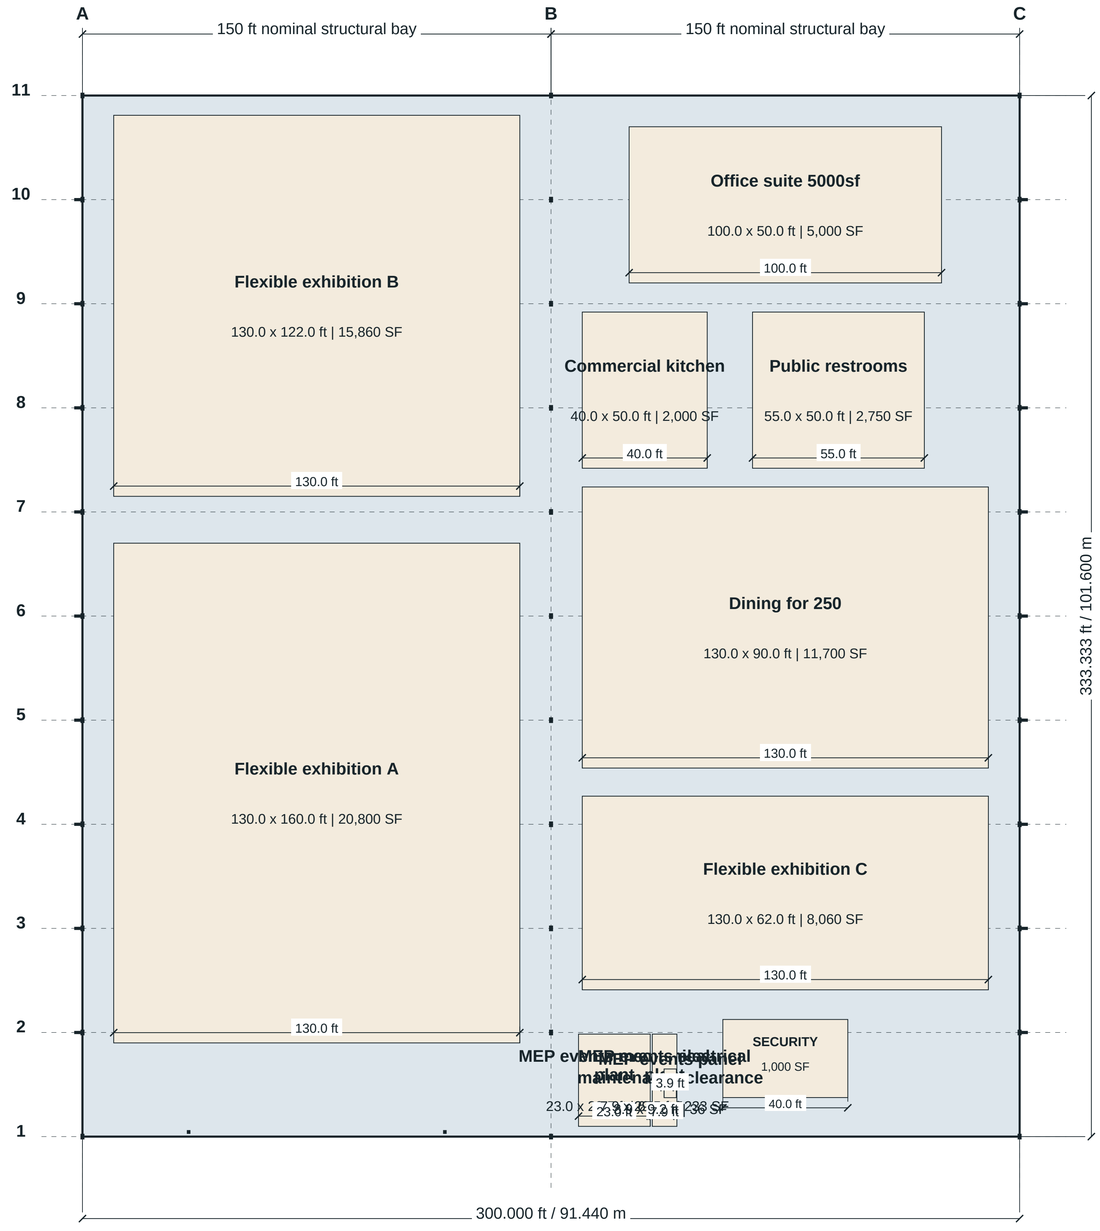

AREA & ROOM SCHEDULE

Flexible exhibition A: 20,800 SF allocated

Flexible exhibition B: 15,860 SF allocated

Flexible exhibition C: 8,060 SF allocated

Dining for 250: 11,700 SF allocated

Commercial kitchen: 2,000 SF allocated

Public restrooms: 2,750 SF allocated

Office suite 5000sf: 5,000 SF allocated

Security private entrance 1000sf: 1,000 SF allocated

MEP events mechanical plant: 678 SF allocated

MEP events electrical plant: 233 SF allocated

MEP events panel maintenance clearance: 36 SF allocated

DOORS & FIT-OUT

Actual openings/fills are included in IFC walls. Front/rear entrance pairs, side exit and high service opening are shown. Door schedule is schematic; quantity, swing, fire rating and travel distances need code review.

Named door dimensions are measured below from exported native door records; operation, accessibility, hardware and rating remain design decisions.

Court planes are native IFC layout annotations. Their graphical depth and Z offsets are not built floor steps or finish layers. Toilet/kitchen fittings are diagram allowances. 250 dining seats are measured.

Two 50,000 SF sections are defined by the structural bay line. The 150 ft nominal grid has 148.885 ft between proposed column faces. Room areas sit inside the 100,000 SF gross hall.

SCHEMATIC | NOT ISSUED FOR CONSTRUCTION | 02 OCTOBER 2026

Assumed site and datum. Dimensions govern concept coordination only. Professional design, survey and approvals required.


ACTUAL EXPORTED OPENING / ASSEMBLY DIMENSIONS

events front entrance bay1	2.4384m x 2.7432m	ENTRY / EGRESS
events rear entrance bay0	2.4384m x 2.7432m	ENTRY / EGRESS
events rear entrance bay1	2.4384m x 2.7432m	ENTRY / EGRESS
events west egress 2	2.4384m x 2.7432m	ENTRY / EGRESS
events west egress 6	2.4384m x 2.7432m	ENTRY / EGRESS
events east loading 7	4.2672m x 4.5720m	LOADING
Commercial kitchen front partition double door	1.2200m x 2.4384m	ENTRY / EGRESS
Public restrooms front partition double door	1.2200m x 2.4384m	ENTRY / EGRESS
Office suite 5000sf front partition double door	1.2200m x 2.4384m	ENTRY / EGRESS
Security private entrance 1000sf front partition double door	1.2200m x 2.4384m	ENTRY / EGRESS
MEP events mechanical access wall double door	1.2000m x 2.7432m	ENTRY / EGRESS
MEP events electrical access wall double door	1.2000m x 2.7432m	ENTRY / EGRESS
events mainentry pairedunit01	2.4384m x 3.0500m	ENTRY / EGRESS
events mainentry pairedunit01	2.4384m x 3.0500m	ENTRY / EGRESS
events mainentry pairedunit02	2.4384m x 3.0500m	ENTRY / EGRESS
events mainentry pairedunit03	2.4384m x 3.0500m	ENTRY / EGRESS

Door records identify geometric assemblies and exact model dimensions. Large public openings contain separately detailed paired leaves; no unsupported single24ft door leaf is specified.

Fire rating, operation/swing, panic hardware, closers, automation, glazing impact/safety, thresholds and accessible clear widths require selection and code coordination.

The plan reflects actual native opening/fill relations. Wall-layer voids and leaf/frame hardware exist as geometric design intent, not an approved manufacturer shop drawing.

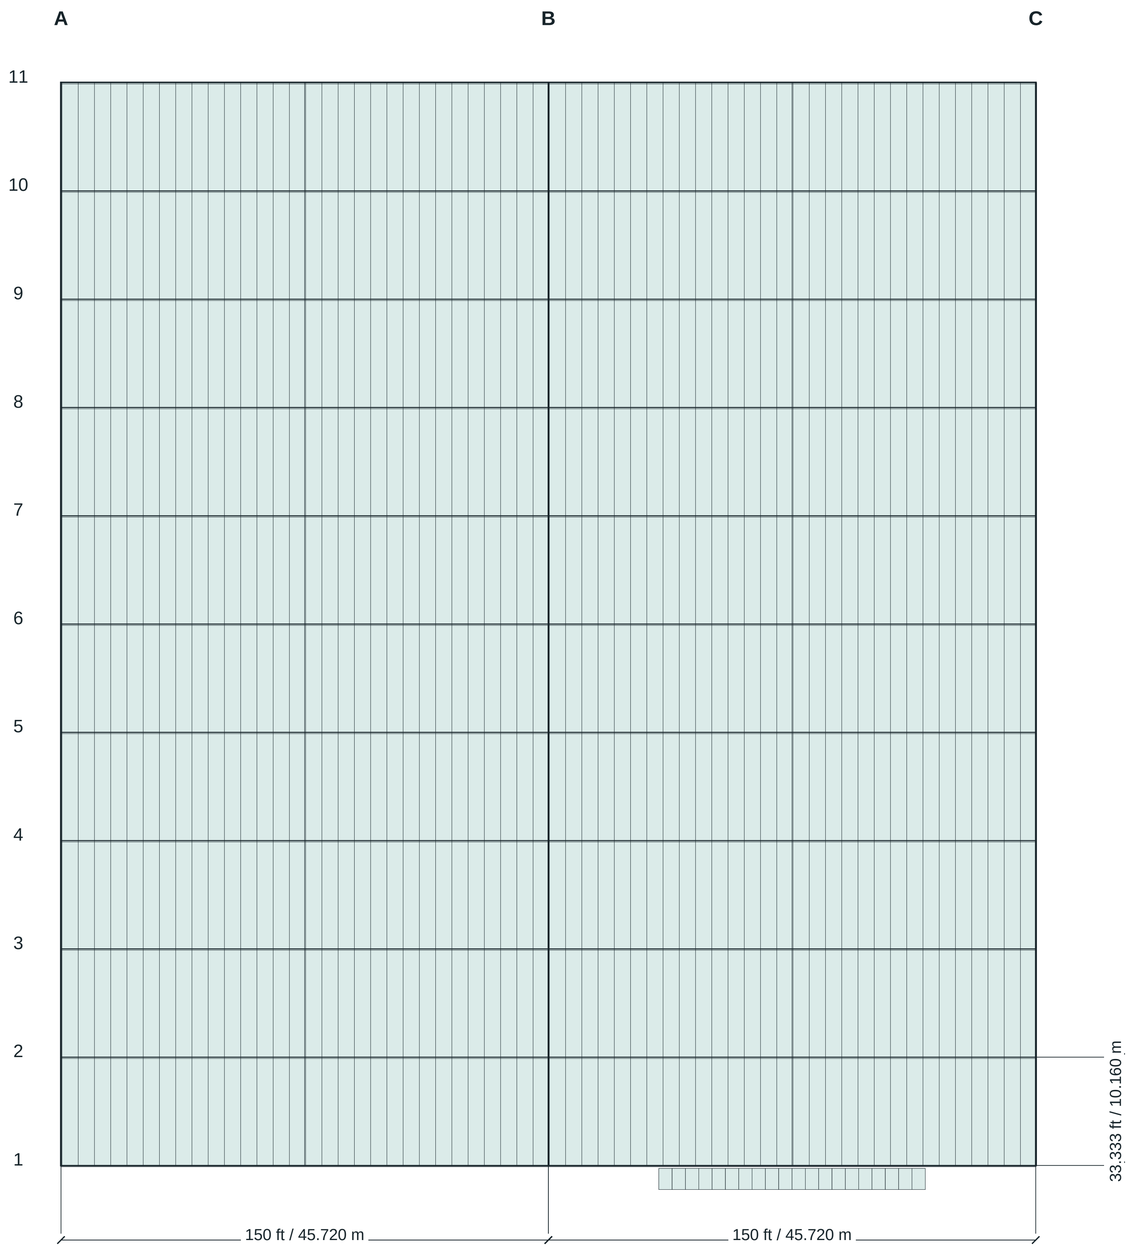

ROOF FAMILY

BUTTERFLY

Both halls use the shown roof family on the same underlying two-bay grid. Frames repeat at 10.160 m centers. Member profiles are native editable IFC extrusions.

The model shows geometry and a proposed load-path arrangement. It does not establish structural adequacy, vibration performance, stability, connection design, thermal movement or lateral loads.

PROPOSED PROFILE REGISTER

C1 hall column: 500 x 340 mm I-shaped section; web/flange geometry proposed.

Bottom chord: 600 x 250 mm I-shaped section; lowest modeled roof-member datum is coordinated to the 37 ft target.

Top chord: 300 x 180 mm I-shaped section, segmented to the roof profile.

Secondary: 180 x 360 mm proposed glulam in 10.160 m segments.

Web/lateral members: schematic square profile. No grade, capacity or connection is approved.

SL1 hall slab: proposed 200 mm; reinforcement, foundations, bearing and soil design omitted pending engineering.

W1 / R1: proposed insulated wall and standing-seam roof. Final layer specification, U-values, fire rating, waterproofing and drainage design pending.

ACTUAL FRONT ARRIVAL VAULT


25.000 m | Folded butterfly wing

Edge +9.500 m; center +6.000 m.


80mm timber deck /4mm weather layer /12mm metal skin and clip envelope, proposed

Two interior pylons and repeated steel ribs; engineering pending.

01 | TRANSVERSE ROOF SECTION, TWO REPEATING BAYS

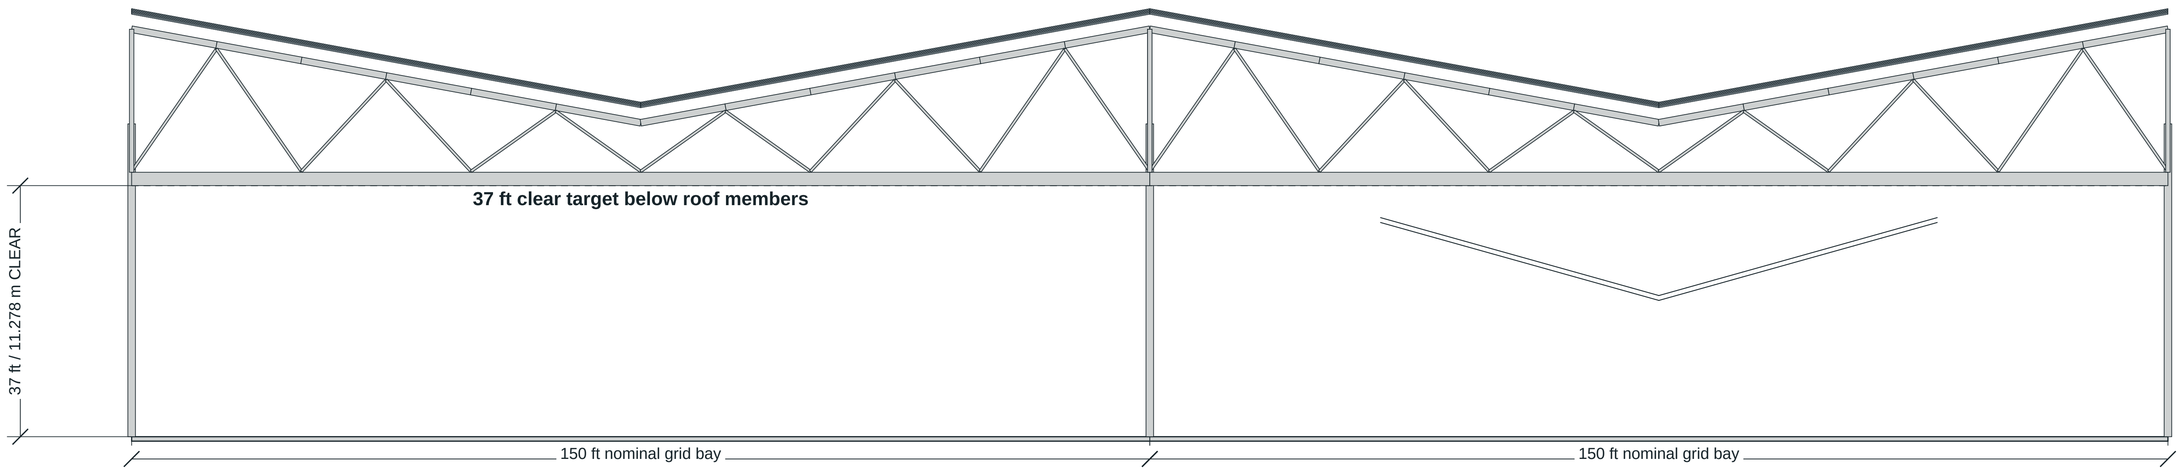

02 | LONGITUDINAL SECTION ENVELOPE

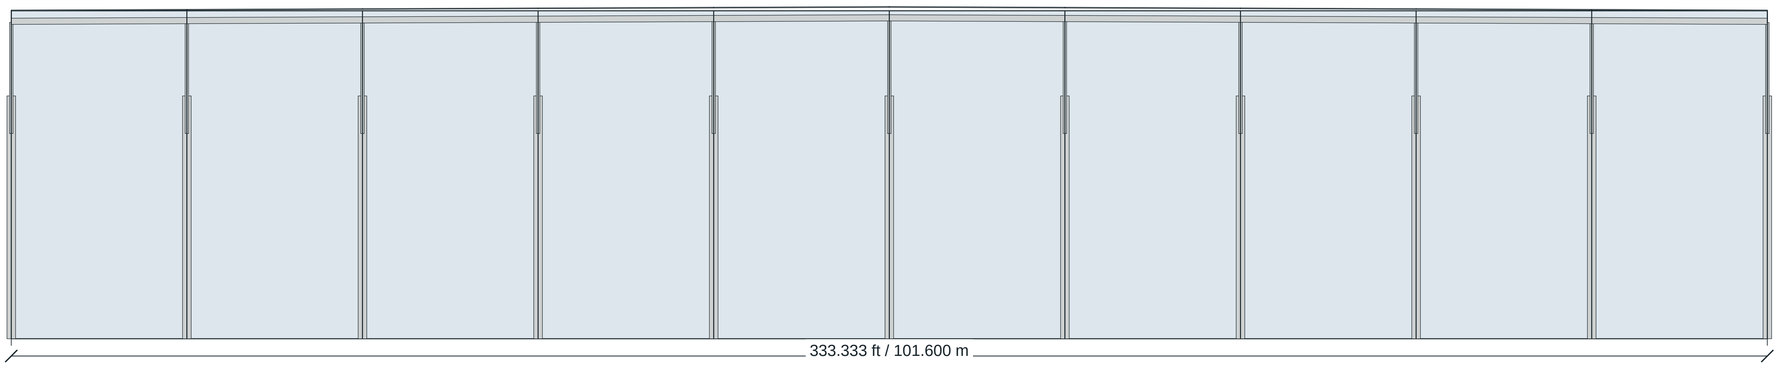


Elevations use the local hall coordinates and roof skin vertices from the exported model. Both hall bodies share the same dimensions; entrance canopies, roof families and garage architecture vary by option.


Actual concept joints, gutters/downpipes, glazing grids and facade supports appear in the model and detail sheets. Waterproofing, capacities, fasteners and rated assemblies require final specification.

Final pad levels and soil bearing are unknown. Slab and footing design require geotechnical inputs, flood/drainage levels and structural loads.


01 | LOCAL FRONT FACADE | hall rotated 0 degrees on assumed site

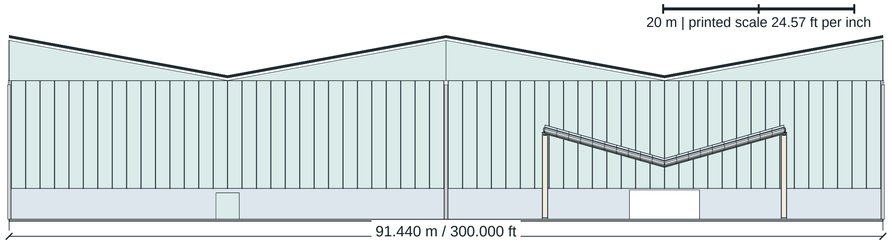


02 | LOCAL REAR FACADE | hall rotated 0 degrees on assumed site

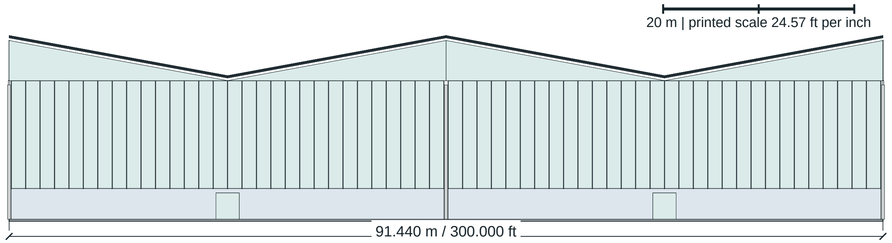

03 | LOCAL WEST FACADE | hall rotated 0 degrees on assumed site

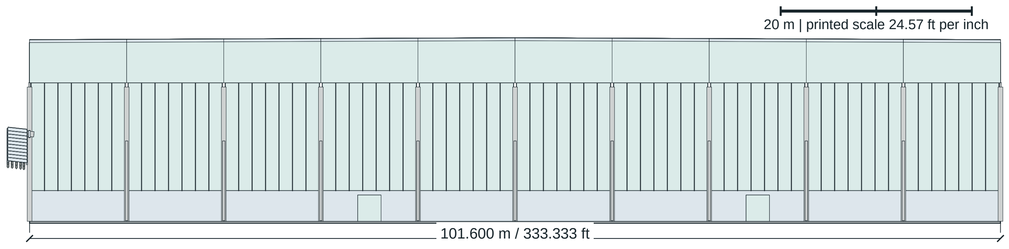


04 | LOCAL EAST FACADE | hall rotated 0 degrees on assumed site

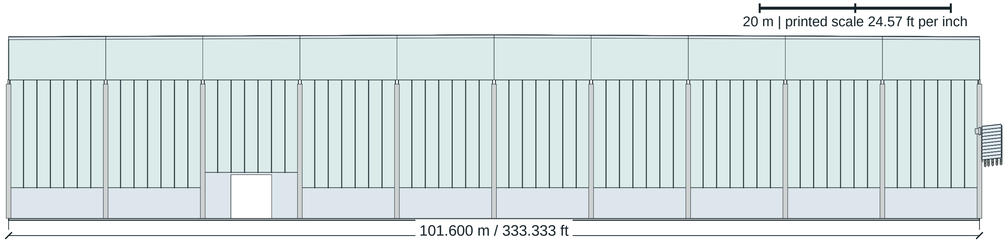


Orthographic projections use saved-model wall, curtain-wall, column, door, canopy and roof vertices. Local facade labels avoid implying verified geographic orientation.

Visible openings and modeled facade joints reflect the coordinated concept. Glazing anchors, flashing interfaces, hardware, fire ratings and connection capacities require professional specification.


01 | LOCAL FRONT FACADE | hall rotated 0 degrees on assumed site

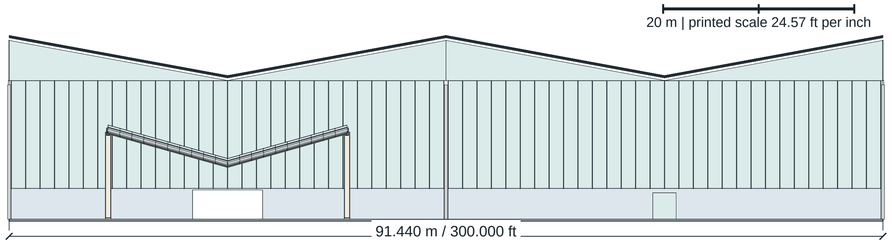


02 | LOCAL REAR FACADE | hall rotated 0 degrees on assumed site

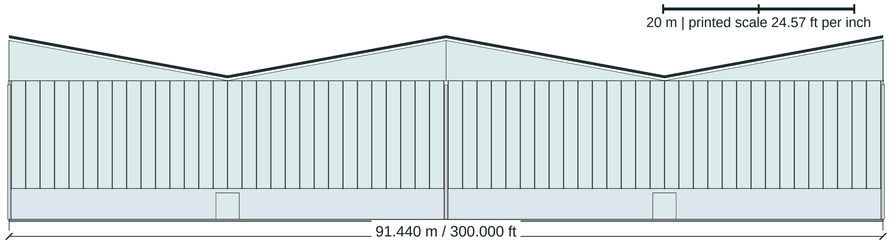

03 | LOCAL WEST FACADE | hall rotated 0 degrees on assumed site

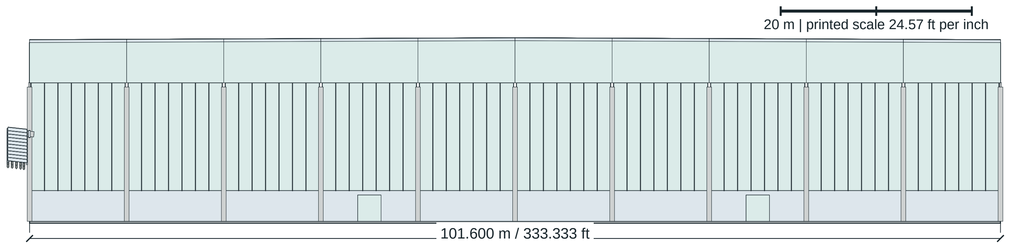


04 | LOCAL EAST FACADE | hall rotated 0 degrees on assumed site

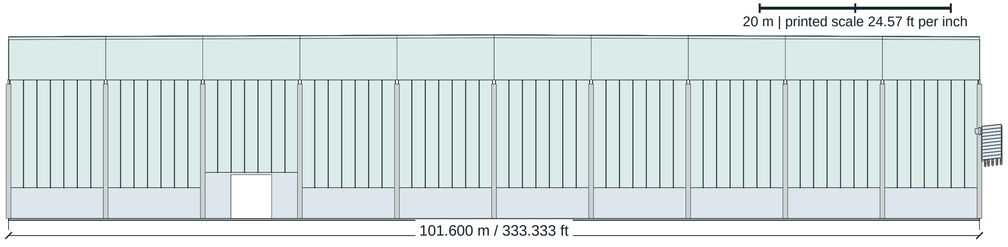

Orthographic projections use saved-model wall, curtain-wall, column, door, canopy and roof vertices. Local facade labels avoid implying verified geographic orientation.

Visible openings and modeled facade joints reflect the coordinated concept. Glazing anchors, flashing interfaces, hardware, fire ratings and connection capacities require professional specification.

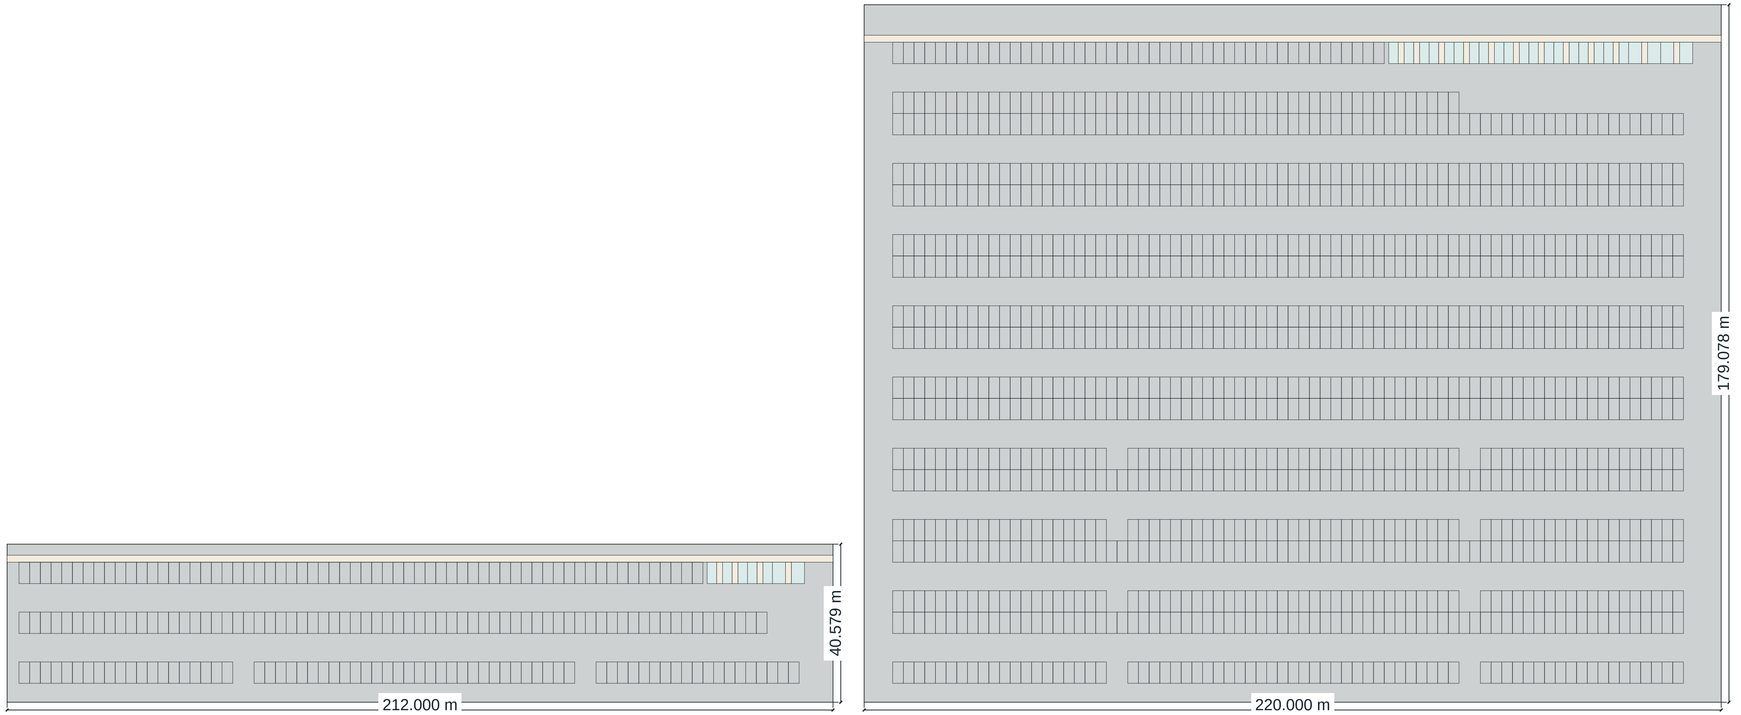

MEASURED PARKING

option-05-lot-1: 1290 spaces; 23 accessible; 4 van.

option-05-lot-2: 210 spaces; 7 accessible; 2 van.

Standard stall: 9 x 18 ft.


Two-way aisle: 24 ft.

Accessible car stall: 8 ft. Van stall: 11 ft. Adjacent access aisle: 5 ft.

ISA and VAN ACCESSIBLE signs are actual visible geometry; mounting and final sign details require review.

Flush protected rear walks connect the reserved accessible bays. Surveyed grades and shortest-route/entrance crossing review remain unresolved.

SPORTS | ROOF EDGE SECTION



MODELED LAYERS, VERTICAL CONCEPT THICKNESS

55 mm | profiled structural liner envelope

3 mm | vapour-control layer

220 mm | continuous roof insulation

45 mm | standing-seam sheet and clip zone

DRAINAGE & STRUCTURE

4 modeled primary/overflow outlet reservations.

Roof deck underside min +14.500m. Main steel lower chords coordinate to37 ft clear datum. Repeated glulam secondaries carry timber character; structural design unresolved.

600x250mm lower steel chord;300x180mm upper chord;500x340mm proposed steel columns;180x360mm rectangular glulam secondaries. Profiles are native editable IFC.

EVENTS | ROOF EDGE SECTION



MODELED LAYERS, VERTICAL CONCEPT THICKNESS

55 mm | profiled structural liner envelope

3 mm | vapour-control layer

220 mm | continuous roof insulation

45 mm | standing-seam sheet and clip zone

DRAINAGE & STRUCTURE

4 modeled primary/overflow outlet reservations.

Roof deck underside min +14.500m. Main steel lower chords coordinate to37 ft clear datum. Repeated glulam secondaries carry timber character; structural design unresolved.

600x250mm lower steel chord;300x180mm upper chord;500x340mm proposed steel columns;180x360mm rectangular glulam secondaries. Profiles are native editable IFC.


FACADE, OPENINGS AND CONNECTIONS

Stone rainscreen: modeled1,200x600mm modules,8mm recessed joints, backing/cavity layers and secondary support reservations. Final quarry product, anchors and substrate require specification.

Glazing:50x150mm modeled mullions, explicit panes/head conditions, real native wall voids and door fills. Glass safety, air/water performance, fire separation and anchors remain design decisions.

Roof skin, insulation, deck and timber lining are individual native elements. Folded entrance canopies, expressed structure, flashings, gutters/downpipes and proposed plates are actual geometry.

Member plate geometry shows connection intent only. No bolt strength, weld schedule, load capacity, bracing analysis, waterproofing warranty or approved fabrication detail is established.

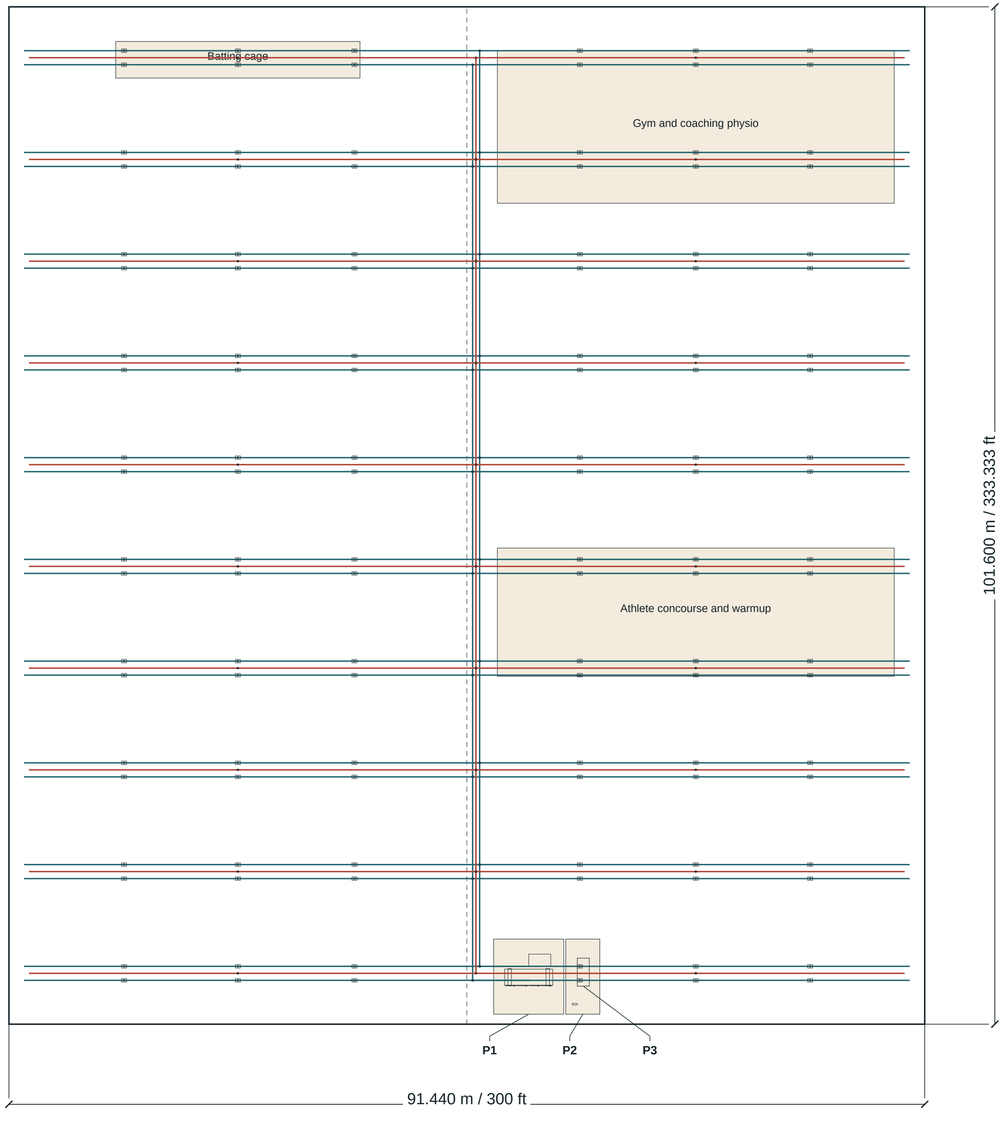

PLANT / SERVICE KEYS

P1 | MECHANICAL PLANT

P2 | ELECTRICAL PLANT

P3 | PANEL MAINTENANCE CLEARANCE

NATIVE SYSTEMS SCHEDULE

FIRE

sports-alarm: 1 physical native elements

FIRE

sports-fire-water: 137 physical native elements

MECHANICAL

sports-return: 242 physical native elements

MECHANICAL

sports-supply: 253 physical native elements

Routes are projected from actual native system endpoints and physical bounds. Each segment belongs to an IFC distribution system; connections and fittings are modeled where listed.


Services and structure are coordinated to the37 ft clear target. Above-ceiling reservations and penetrations are schematic; equipment access and all clearances require approval.

Airflow, thermal loads, acoustic treatment, duct pressure losses and humidity control are unresolved.

Sprinkler branches are a proposed system topology. Hazard, head selection/coverage, obstructions, pump/tank demand and hydraulic supply are unapproved.

Plumbing fixture quantities, demand, pipe slopes/inverts, trap/vent sizing, backflow and grease treatment require design review.

Electrical routes and boards reserve space. Feeder ampacity, fault/arc-flash protection, bonding/grounding and20 MW utility approval are not established.

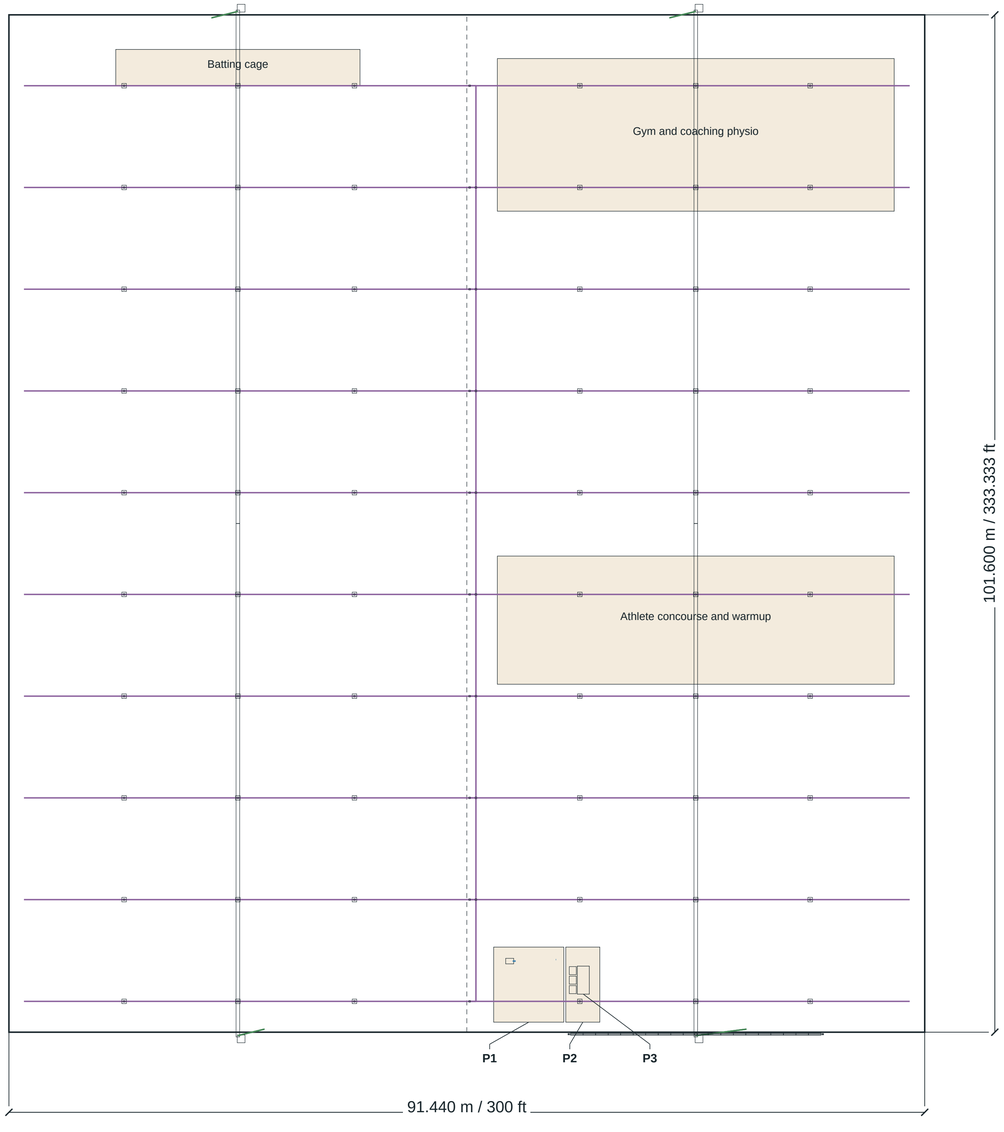

PLANT / SERVICE KEYS

P1 | MECHANICAL PLANT

P2 | ELECTRICAL PLANT

P3 | PANEL MAINTENANCE CLEARANCE

NATIVE SYSTEMS SCHEDULE

DRAINAGE
sports-storm-overflow: 4 physical native elements

DRAINAGE
sports-storm-primary: 45 physical native elements

ELECTRICAL
sports-distribution: 3 physical native elements

ELECTRICAL
sports-lighting-power: 307 physical native elements

PLUMBING
sports-domestic-cold: 3 physical native elements

PLUMBING
sports-domestic-hot: 1 physical native elements

Routes are projected from actual native system endpoints and physical bounds. Each segment belongs to an IFC distribution system; connections and fittings are modeled where listed.


Services and structure are coordinated to the37 ft clear target. Above-ceiling reservations and penetrations are schematic; equipment access and all clearances require approval.

Airflow, thermal loads, acoustic treatment, duct pressure losses and humidity control are unresolved.

Sprinkler branches are a proposed system topology. Hazard, head selection/coverage, obstructions, pump/tank demand and hydraulic supply are unapproved.

Plumbing fixture quantities, demand, pipe slopes/inverts, trap/vent sizing, backflow and grease treatment require design review.

Electrical routes and boards reserve space. Feeder ampacity, fault/arc-flash protection, bonding/grounding and20 MW utility approval are not established.

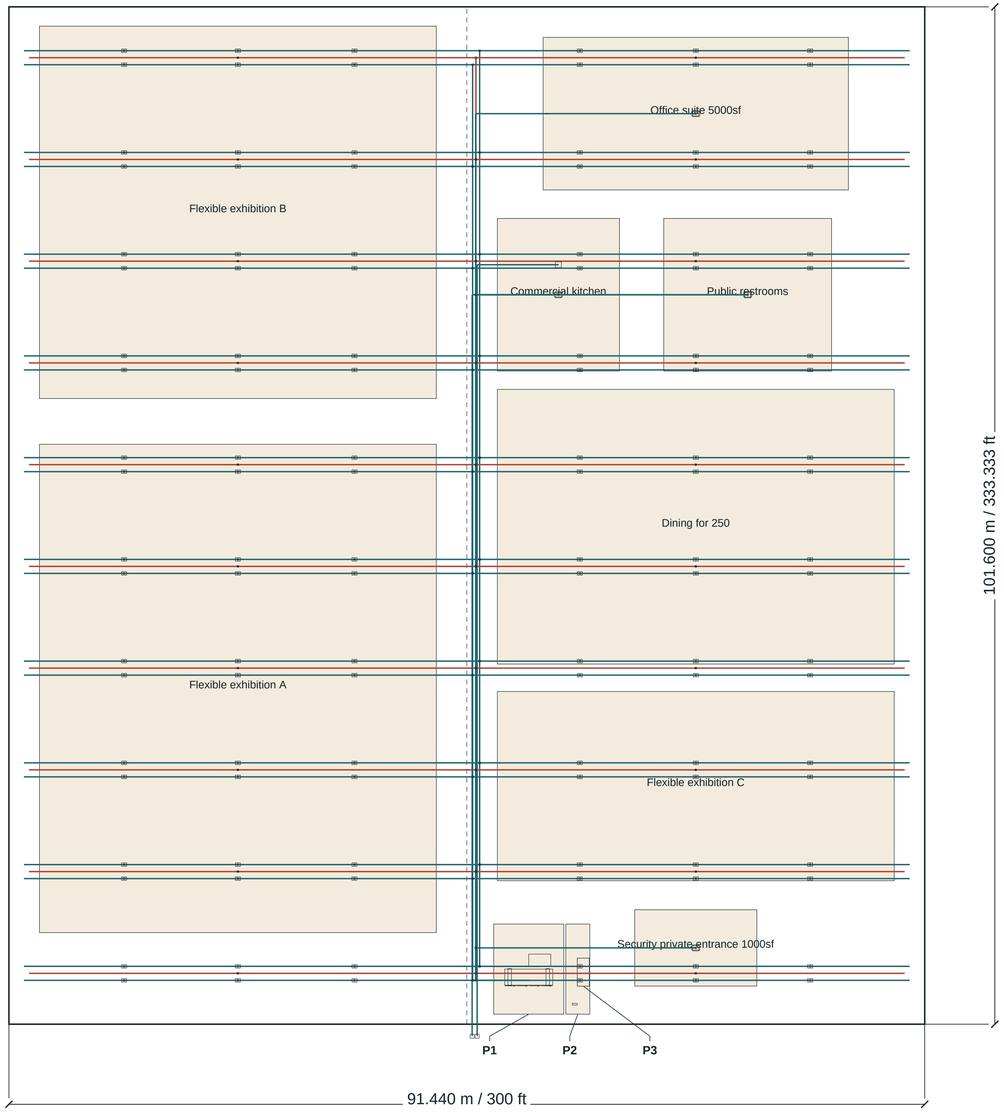

PLANT / SERVICE KEYS

P1 | MECHANICAL PLANT

P2 | ELECTRICAL PLANT

P3 | PANEL MAINTENANCE CLEARANCE

NATIVE SYSTEMS SCHEDULE

FIRE
events-alarm: 1 physical native elements

FIRE
events-fire-water: 137 physical native elements

MECHANICAL
events-controls: 4 physical native elements

MECHANICAL
events-kitchen-exhaust: 5 physical native elements

MECHANICAL
events-return: 242 physical native elements

MECHANICAL
events-supply: 283 physical native elements

MECHANICAL
events-toilet-exhaust: 5 physical native elements

Routes are projected from actual native system endpoints and physical bounds. Each segment belongs to an IFC distribution system; connections and fittings are modeled where listed.

Services and structure are coordinated to the37 ft clear target. Above-ceiling reservations and penetrations are schematic; equipment access and all clearances require approval.

Airflow, thermal loads, acoustic treatment, duct pressure losses and humidity control are unresolved.

Sprinkler branches are a proposed system topology. Hazard, head selection/coverage, obstructions, pump/tank demand and hydraulic supply are unapproved.

Plumbing fixture quantities, demand, pipe slopes/inverts, trap/vent sizing, backflow and grease treatment require design review.

Electrical routes and boards reserve space. Feeder ampacity, fault/arc-flash protection, bonding/grounding and20 MW utility approval are not established.



PLANT / SERVICE KEYS

P1 | MECHANICAL PLANT

P2 | ELECTRICAL PLANT

P3 | PANEL MAINTENANCE CLEARANCE

NATIVE SYSTEMS SCHEDULE

DRAINAGE
events-storm-overflow: 4 physical native elements

DRAINAGE
events-storm-primary: 45 physical native elements

ELECTRICAL
events-distribution: 3 physical native elements

ELECTRICAL
events-lighting-power: 307 physical native elements

PLUMBING
events-domestic-cold: 75 physical native elements

PLUMBING
events-domestic-hot: 13 physical native elements

PLUMBING
events-grease-waste: 4 physical native elements

PLUMBING
events-sanitary: 53 physical native elements

PLUMBING
events-sanitary-vent: 4 physical native elements

Routes are projected from actual native system endpoints and physical bounds. Each segment belongs to an IFC distribution system; connections and fittings are modeled where listed.

Services and structure are coordinated to the37 ft clear target. Above-ceiling reservations and penetrations are schematic; equipment access and all clearances require approval.


Airflow, thermal loads, acoustic treatment, duct pressure losses and humidity control are unresolved.

Sprinkler branches are a proposed system topology. Hazard, head selection/coverage, obstructions, pump/tank demand and hydraulic supply are unapproved.


Plumbing fixture quantities, demand, pipe slopes/inverts, trap/vent sizing, backflow and grease treatment require design review.

Electrical routes and boards reserve space. Feeder ampacity, fault/arc-flash protection, bonding/grounding and20 MW utility approval are not established.

SPORTS | FRONT SERVICE-ZONE PROJECTION

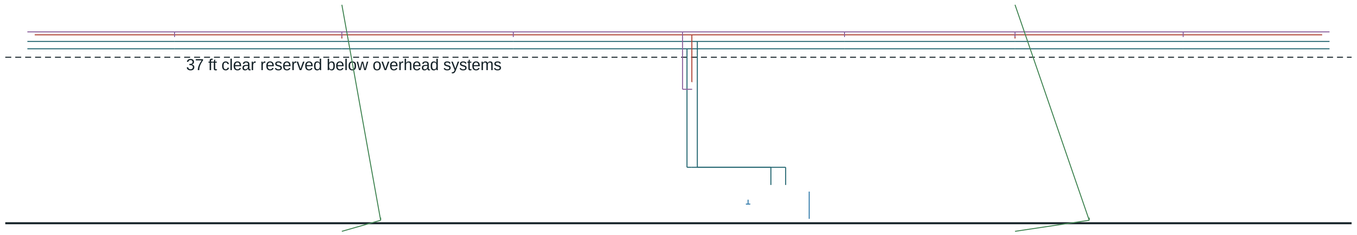

EVENTS | FRONT SERVICE-ZONE PROJECTION

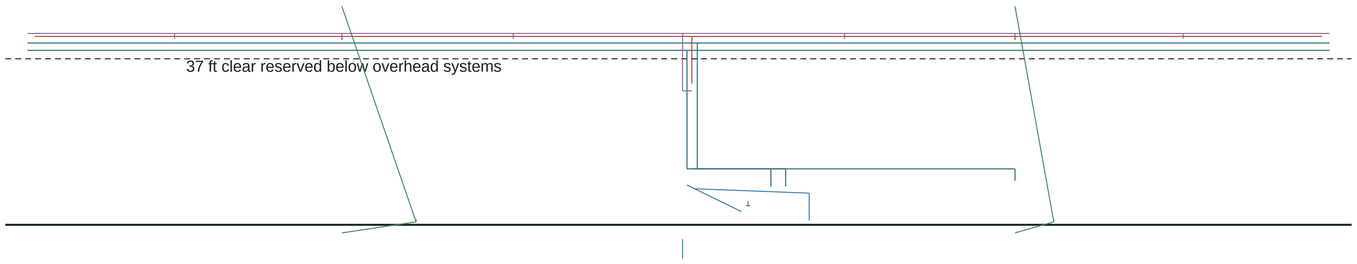

PLANT AND NETWORK INTERFACES

Dedicated plant/service reservations contain actual enclosures, air-handling equipment, electrical panels, fire and water interfaces. System element dimensions remain proposed.

Physical wall penetrations are native openings. Sleeves, seals, firestop, reinforcement and waterproofing require signed detail review.

Roof gutters/leaders from architecture are adopted by the drainage network, avoiding duplicated geometry. Primary and overflow discharge approvals remain required.

RELEASE HOLD POINTS

survey/geotechnical/civil inverts

adopted local codes and occupancy

structural loads supports deflection and penetrations

ASHRAE ventilation/comfort/humidity and acoustic sizing

NFPA13 hazard hydraulic supply and obstruction review

plumbing fixture demand DFU backflow and sewer/grease approval

NEC voltage fault grounding coordination and utility20MW feasibility


equipment access replacement and commissioning

garage open classification ventilation smoke/fire and drainage design


The model contains schematic distribution topology and native geometric routes. It is a coordination deliverable for professional development; it is not a complete approved mechanical/plumbing/electrical design.

Native system and element identifiers, proposed dimensions and unresolved decisions are exported in the separate systems schedule.

SOCCER-1 | 105 x 68 m

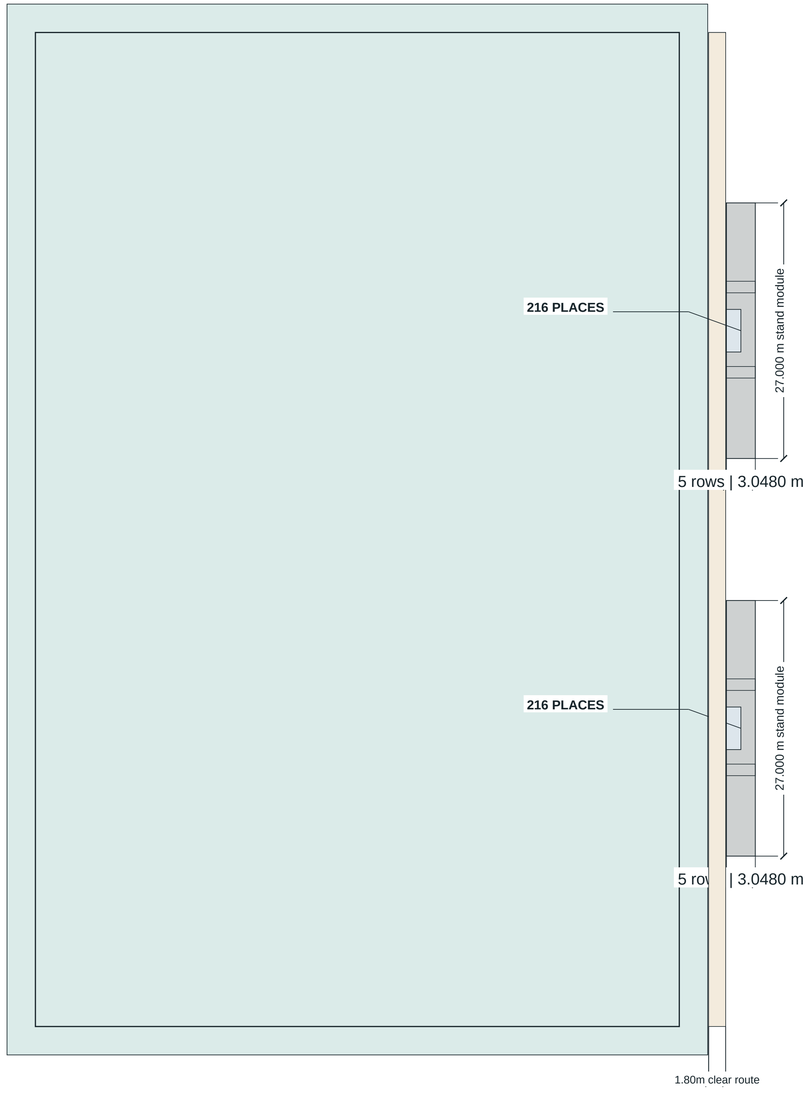

SOCCER-2 | 105 x 68 m

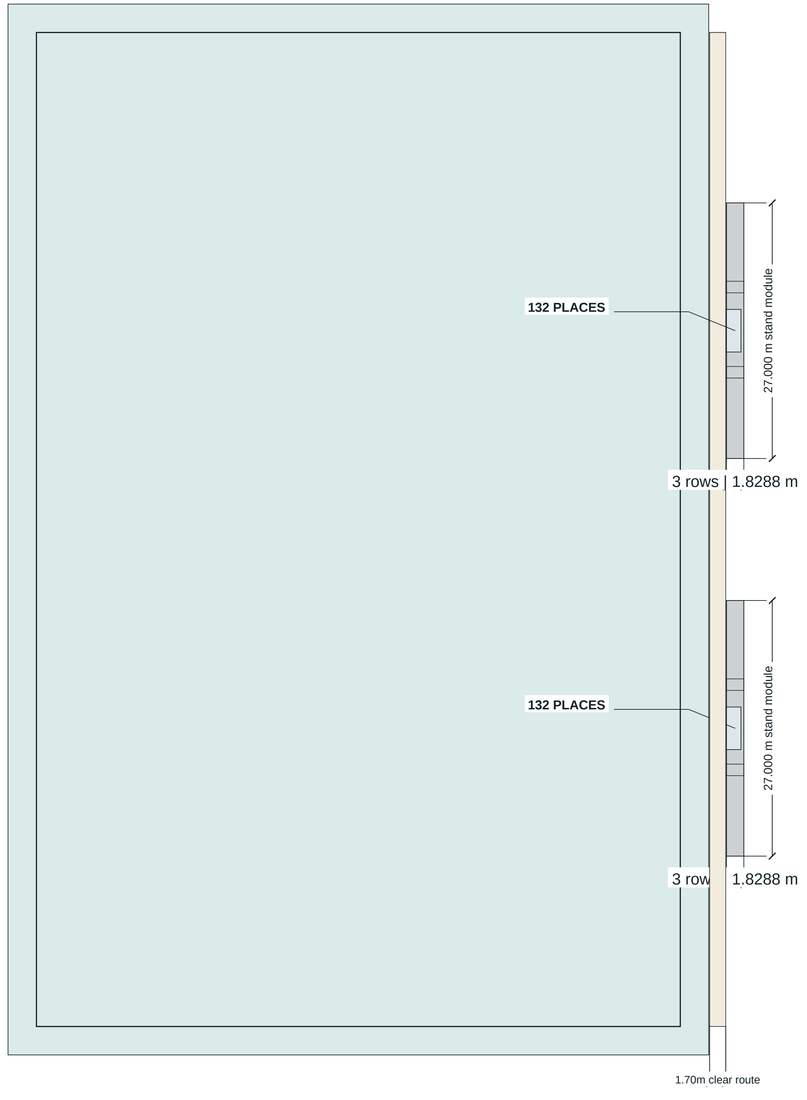

MEASURED INTENT

4 modular stands; 696 total proposed positions.

Seating sits on touchlines only, inside the length of the playing field. Both goal ends and 3m runoff remain clear.

Three rows in the 4m inter-pitch strip; five rows at the outer east touchline.


27m modules; 609.6mm treads; 203.2mm row rise; 457.2mm bench-place assumption.

1.70m / 1.80m clear front routes; wheelchair/companion recesses replace bench blocks.

Counts are proposed geometric positions. Final manufacturer system, foundations, sightlines, guards, egress, accessible dispersion and approvals remain required.


TYPICAL BLEACHER STAIR AISLE

Two 1.220 m clear aisles per module

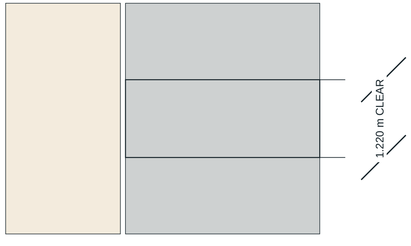

SCHEMATIC | NOT ISSUED FOR CONSTRUCTION | 02 OCTOBER 2026

Assumed site and datum. Dimensions govern concept coordination only. Professional design, survey and approvals required.

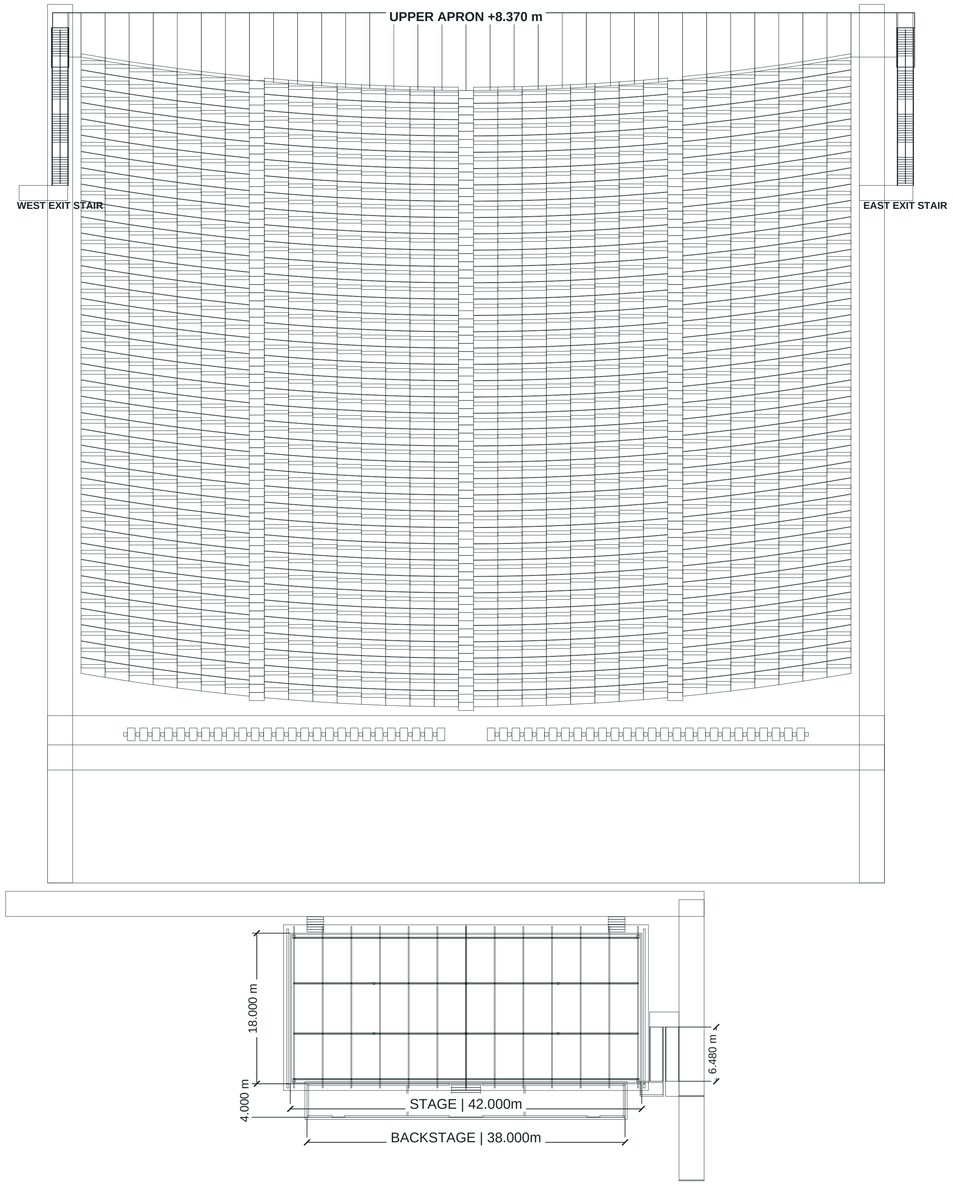

ACTUAL STAGE GEOMETRY

Stage top +1.200m; canopy high point +9.490m.

4 lattice girders; proposed structural span 41.100m.

6 physical attachment reservations, NOT load-rated.

Backstage: two green rooms, central load-in and roof. Production access approaches the south face; public circulation stays east/north.

Two 6.480 m switchback runs, each 1.50 m clear; 0.540 m rise at 1:12. One typical run dimension shown. Separate upper/lower landings; 1.80 m intermediate landing.


Ramp/guard foundations, drainage, traction, accessible transitions, crowd separation and stage rigging engineering require approval.

38 curved stone terrace rows; 5700 proposed bench positions after aisles.


52 wheelchair + 52 companion positions; additional front standing area.

8,000 guest TARGET; 2196 standing guests would be needed to reach it. Capacity, sightlines, accessible dispersion and egress are unapproved.

LONGITUDINAL SECTION THROUGH ACTUAL WEST STAIR

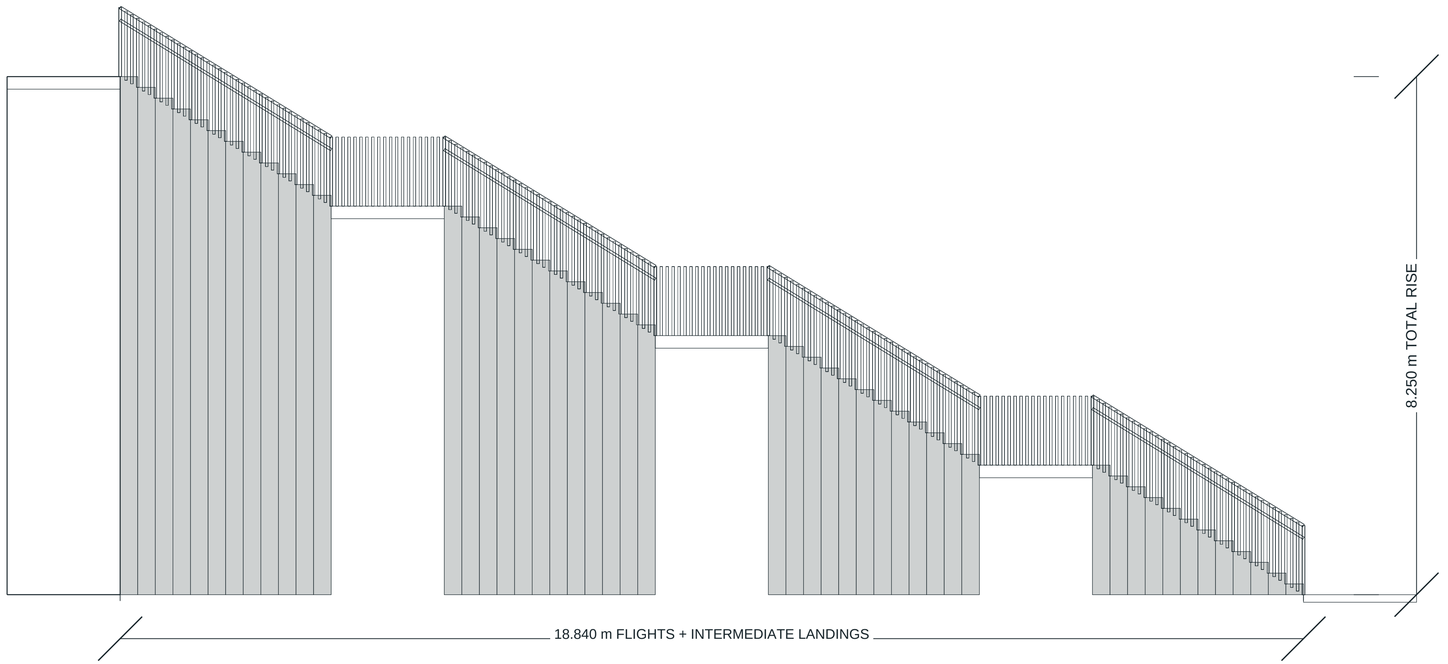

NATIVE STAIR PLAN

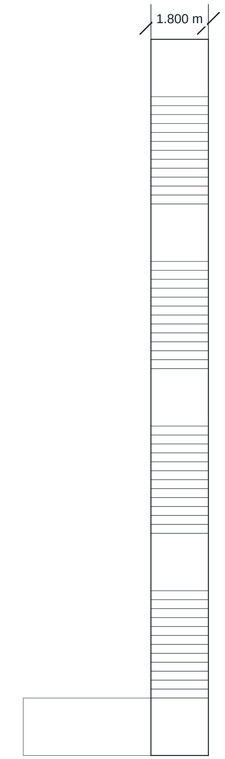

Two matching stairsets: 4 flights of 12 risers = 48 risers per set.

Actual rise 171.875 mm; going 280 mm; clear width 1.800 m. Three intermediate landings, each 1.800 m.


Upper apron / final aisle tread +8.370 m; seating terrace +8.260 m; grade +0.120 m.


18.840 m run includes flights and intermediate landings. Full 22.440 m reserved bounds also include the upper platform and grade-discharge landing.

Apron has actual omitted stair volumes and vertical return faces. Guard infill is modeled; foundations, retaining construction, fixings and loads need engineered details.

Physical grade connections do not establish approved exit capacity or the 8,000 guest target. Dispersed upper-tier accessible viewing, fire/life safety and crowd movement remain unresolved.

FRONTAGES SHOWN IN EACH HALL'S LOCAL COORDINATES

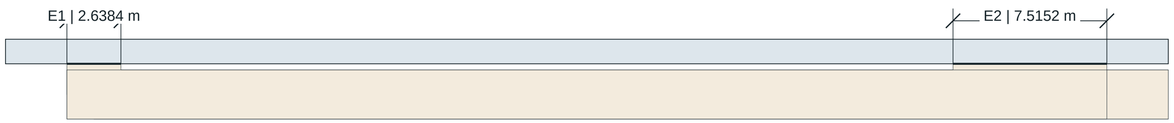

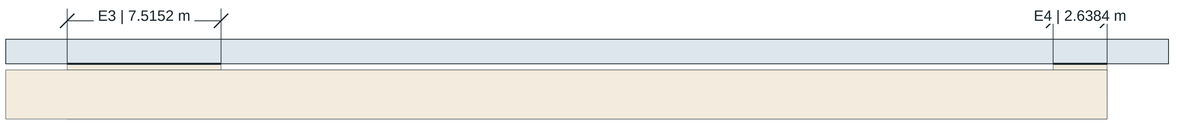

SPORTS HALL | WORLD ROTATION 0 DEG

Floor / landing +0.000 m; all four native front units served.

EVENTS HALL | WORLD ROTATION 0 DEG

Floor / landing +0.000 m; all four native front units served.


LEVEL THROUGH-ROUTE AT THE ENTRANCES

8 existing native sill solids: top +0.006 m; 6 mm above hall floor. Door, opening and sill identities retained.

Front promenade width 2.400 m. The through-route remains level; longitudinal transitions sit beyond the lowered entrance zone.


Landing dimensions show the entire modeled bank plus lateral margins, including the retained paired entrance. Door swings, maneuvering clearances and final hardware remain subject to design review.

NATIVE LONGITUDINAL RETURN

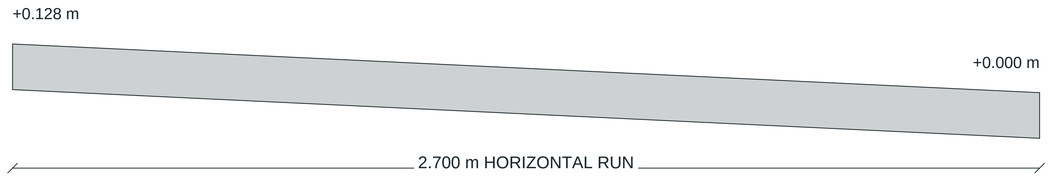

4.7407% longitudinal grade | 0% through-walk cross-slope

NATIVE PARKING / PUBLIC PATH LEVEL TIE

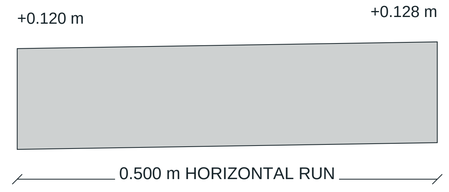

1.60% grade | 8 mm rise beyond cross-walk

Civil holdpoints: survey, drainage, excavation and compaction; sill/hardware weather performance; final accessible maneuvering and traffic controls. Physical continuity shown here does not establish agency or construction approval.

WORLDWIDE STAGES


Butterfly / Folded Horizons

C3.01


ACTUAL RAISED VEHICLE TABLES & PEDESTRIAN CROSSINGS

T1 | HALL-REAR

public-hall-park-2



ACTUAL NATIVE DRIVE SECTION

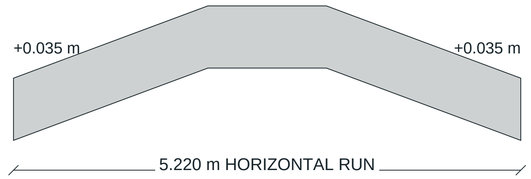

Vertical scale enlarged 8:1; dimensions govern.

93 mm rise | 4.65% outer approaches


World X table 109.8800 to 111.1000 m.

Top levels are cut from the exported native pavement mesh.


Full modeled drive width 7.3152 m | travel X

T2 | SOUTH-LOT-END

lot-2-accessible-link



ACTUAL NATIVE DRIVE SECTION



Vertical scale enlarged 8:1; dimensions govern.

85 mm rise | 4.25% outer approaches


World Y table 35.9456 to 40.4600 m.

Top levels are cut from the exported native pavement mesh.


Full modeled drive width 7.3152 m | travel Y

T3 | STAGE-PRODUCTION

outdoor-front-spine



ACTUAL NATIVE DRIVE SECTION



Vertical scale enlarged 8:1; dimensions govern.

93 mm rise | 4.65% outer approaches


World Y table 180.5780 to 183.5780 m.

Top levels are cut from the exported native pavement mesh.


Full modeled drive width 7.3152 m | travel Y

T4 | STAGE-PRODUCTION

outdoor-perimeter, venue-public-entry

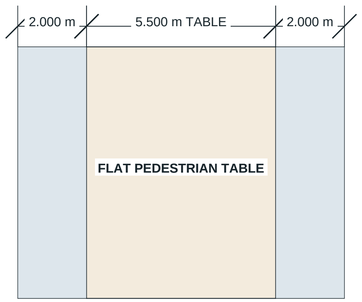

ACTUAL NATIVE DRIVE SECTION



Vertical scale enlarged 8:1; dimensions govern.

93 mm rise | 4.65% outer approaches

World X table 10.0000 to 15.5000 m.

Top levels are cut from the exported native pavement mesh.

Full modeled drive width 7.3152 m | travel X

Traffic control, signs/markings, vehicle swept paths, drainage, compaction and agency approval remain pending. Grade dimensions describe actual modeled solids; they do not certify a road or accessible route.

DIMENSIONED COORDINATION DETAILS

SPORTS WALK	4.000 m clear gap outside soccer runoff and the nearest pickleball free pad. Soccer pitch105 x68 m with3 m clear runoff.
PICKLEBALL MODULE	Playing20 x44 ft;34 x64 ft pad. Inter-pad protected walks2 m nominal. No route crosses another playing court.
PARKING ROW	18 ft stall +24 ft two-way aisle +18 ft stall =60 ft module. Actual stall count accounts for aisles, access bays and end drives.
PUBLIC CIRCULATION	24 ft two-way drives;2.4 to 3 m principal pedestrian corridors; 1.22 m door links. No surveyed vertical profile or fire-apparatus turning envelope is supplied.
POWER RESERVATION	Five diagram equipment boxes reserve space for a20 MW utility target; ratings/capacity, utility ownership, clearances, feeders and substations unapproved.

INFORMATION REQUIRED BEFORE CONSTRUCTION DRAWINGS

1. Confirmed parcel, boundary/title/setbacks and a current boundary/topographic survey. Establish exact relation to the existing campus without importing it into these alternatives.
2. Geotechnical/flood/karst investigation, levels, soil bearing, retaining-wall and foundation strategy.
3. Civil drainage/SWPPP, disturbed acreage, utility easements, access permits and city water/sewer allocation confirmation.
4. Structural loads, member selection, deflection/vibration, fire resistance, foundations, connections and lateral stability.
5. Approved occupancies, event crowd plan, exits/travel distances, fire access, sprinkler/alarm strategy and full accessibility review.
6. HVAC, plumbing/fixture count, commercial kitchen ventilation,20 MW utility capacity, one-line electrical design and backup/lighting controls.
7. Confirmed budget and procurement scope. Licensed Tennessee design team prepares and seals coordinated permit/bid/construction documents.

PRIMARY REFERENCES CONSULTED

Spring Hill commercial construction checklist

Spring Hill civil engineering checklist

US Access Board parking guidance